



4400

Enterprise-grade security appliance (223 SPU/5Gbps)—fast networking and fiber and copper connectivity options

Check Point 4400 Appliance

Today the enterprise gateway is more than a firewall. It is a security device presented with an ever-increasing number of sophisticated threats. As an enterprise security gateway it must use multiple technologies to control network access, detect sophisticated attacks and provide additional security capabilities like data loss prevention and protection from web-based threats. The proliferation of mobile devices like smartphones and Tablets and new streaming, social networking and P2P applications requires a higher connection capacity and new application control technologies. Finally, the shift towards enterprise private and public cloud services, in all its variations, changes the company borders and requires enhanced capacity and additional security solutions.

Check Point's new appliances combine fast networking technologies with high performance multi-core capabilities—providing the highest level of security without compromising on network speeds to keep your data, network and employees secure. Optimized for the Software Blades Architecture, each appliance is capable of running any combination of Software Blades—providing the flexibility and the precise level of security for any business at every network location by consolidating multiple security technologies into a single integrated solution.

Each Check Point Appliance supports the Check Point 3D security vision of combining policies, people and enforcement for unbeatable protection and is optimized for enabling any combination of the following Software Blades: (1) Firewall, (2) VPN, (3) IPS, (4) Application Control, (5) Mobile Access, (6) DLP, (7) URL Filtering, (8) Antivirus, (9) Anti-spam, (10) Anti-Bot, (11) Identity Awareness and (12) Advanced Networking & Clustering.

OVERVIEW

The Check Point 4400 Appliance offers a complete and consolidated security solution, with leading performance in a 1U form factor.

In addition to eight onboard 1 Gigabit copper Ethernet ports, the 4400 also comes with an available expansion slot for the option of adding four 1 Gigabit copper or 2 or 4 fiber Ethernet ports. With 223 SecurityPower Units, max firewall throughput of over 5 Gbps and IPS performance up to 3.5 Gbps the 4400 is capable of securing any small to mid-size office.

KEY FEATURES

- 223 SecurityPower™
- 5 Gbps of firewall throughput
- 3.5 Gbps of IPS throughput
- Up to 12 10/100/1000Base-T ports
- Up to 4 1GbE Fiber ports
- 1 rack unit appliance

KEY BENEFITS

- Entry level, enterprise-grade appliance
- Delivers everything you need to secure your network in one appliance
- Simplifies administration with a single integrated management console
- Ensures data security for remote access and site-to-site communications
- Provides comprehensive security and protects against emerging threats with Extensible Software Blade Architecture

GATEWAY SOFTWARE BLADES

	4407 ¹	4408	4410
Firewall	■	■	■
IPsec VPN	■	■	■
Mobile Access (5 users)	■	■	■
Advanced Networking & Clustering	■	■	■
Identity Awareness	■	■	■
IPS	■	■	■
Application Control	■	■	■
Data Loss Prevention	*	■	*
URL Filtering	*	*	■
Antivirus	*	*	■
Anti-spam	*	*	■
Anti-Bot	*	*	*

* Optional


¹ Secure Web Gateway option available



Datasheet: Check Point 4400 Appliance

4400

- ① Standard rack mount (Slide rails optional)
- ② One network expansion slot
- ③ 8 x 10/100/1000Base-T RJ45 ports
- ④ Two USB ports for ISO installation
- ⑤ Console port RJ45
- ⑥ Graphic LCD display for management IP address and image management

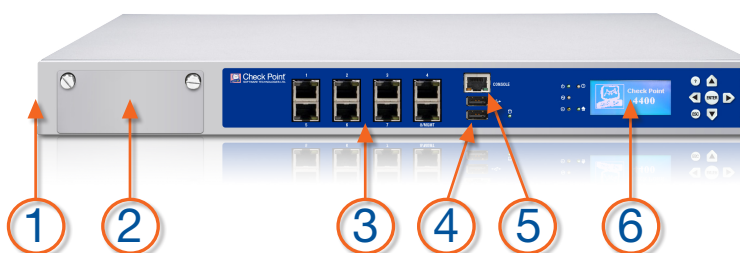

SECURITYPOWER

Until today security appliance selection has been based upon selecting specific performance measurements for each security function, usually under optimal lab testing conditions and using a security policy that has one rule. Today customers can select security appliances by their SecurityPower ratings which are based on real-world customer traffic, multiple security functions and a typical security policy.

SecurityPower is a new benchmark that measures the capability and capacity of an appliance to perform multiple advanced security functions (Software Blades) such as IPS, DLP and Application Control in real world traffic conditions. This provides an effective metric to better predict the current and future behavior of appliances under security attacks and in day-to-day operations. Customer SecurityPower Unit (SPU) requirements, determined using the Check Point Appliance Selection Tool, can be matched to the SPU ratings of Check Point Appliances to select the right appliance for their specific requirements.

ALL-INCLUSIVE SECURITY SOLUTION

The Check Point 4400 Appliance offers a complete and consolidated security solution in a 1U form factor based on the Check Point Software Blade architecture. Available in three software packages of 7, 8 and 10 Blades, the platform provides up-to-date and extensible security protection.

INTEGRATED SECURITY MANAGEMENT

The appliance can either be managed locally with its available integrated security management or via central unified management. Using local management, the appliance can manage itself and one adjacent appliance for high availability purposes.

REMOTE ACCESS CONNECTIVITY FOR MOBILE DEVICES

Each appliance arrives with mobile access connectivity for 5 users, using the Mobile Access Blade. This license provides secure remote access to corporate resources from a wide variety of devices including smartphones, tablets, PCs, Mac and Linux.

GAiA—THE UNIFIED SECURITY OS

Check Point GAiA™ is the next generation Secure Operating System for all Check Point appliances, open servers and virtualized gateways. GAiA combines the best features from IPSO and SecurePlatform into a single unified OS providing greater efficiency and robust performance. By upgrading to GAiA, customers will benefit from improved appliance connection capacity and reduced operating costs. With GAiA, customers will gain the ability to leverage the full breadth and power of all Check Point Software Blades. GAiA secures IPv4 and IPv6 networks utilizing the Check Point Acceleration & Clustering technology and it protects the most complex network environments by supporting dynamic routing protocols like RIP, OSPF, BGP, PIM (sparse and dense mode) and IGMP. As a 64-Bit OS, GAiA increases the connection capacity of select appliances.

GAiA simplifies management with segregation of duties by enabling role-based administrative access. Furthermore, GAiA greatly increases operation efficiency by offering Automatic Software Updates. The intuitive and feature-rich Web interface allows for instant search of any commands or properties. GAiA offers full compatibility with IPSO and SecurePlatform command line interfaces, making it an easy transition for existing Check Point customers.



TECHNICAL SPECIFICATIONS

Base Configuration
8 x 10/100/1000Base-T RJ45 ports
250 GB hard disk drive
One AC power supply
Standard rack mount
Network Expansion Slot Options (1 slot)
4 x 10/100/1000Base-T RJ45 ports
2 x 1000Base-F SFP ports
4 x 1000Base-F SFP ports
4 x 10/100/1000Base-T Fail-Open NIC
4 x 1000Base-F SX or LX Fail-Open NIC
Max Configuration
12 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 + 4 x 1000Base-F SFP ports
Performance
223 SecurityPower ¹
5 Gbps of firewall throughput, 1518 byte UDP
1.2 Gbps of VPN throughput, AES-128
3.5 Gbps of IPS throughput Default IPS profile
700 Mbps of IPS throughput Recommended IPS profile
1.2 million concurrent connections
40,000 connections per second
Network Connectivity
IPv4 and IPv6
1024 VLANs
256 VLANs per interface
802.3ad passive and active link aggregation
Layer 2 (transparent) and Layer 3 (routing) mode

¹ SecurityPower: A metric to measure appliance performance based on real world traffic given the deployed software blades. Find the right appliance for your performance and security needs.

High Availability
Active/Active - L3 mode
Active/Passive - L3 mode
Session synchronization for firewall and VPN
Session failover for routing change
Device failure detection
Link failure detection
ClusterXL or VRRP
Virtual Systems
Max VSs: 10
Dimensions
Enclosure: 1U
Standard (W x D x H): 17.25 x 12.56 x 1.73 in.
Metric (W x D x H): 438 x 320 x 44 mm
Weight: 7.5 kg (16.53 lbs.)
Power Requirements
AC Input Voltage: 100 - 240V
Frequency: 50 - 60 Hz
Single Power Supply Rating: 250 W
Power Consumption Maximum: 90 W
Maximum thermal output: 240.1 BTU
Operating Environmental Conditions
Temperature: 32° to 104°F / 0° to 40°C
Humidity: 20% - 90% (non-condensing)
Storage Conditions
Temperature: - 4° to 158°F / - 20° to 70°C
Humidity: 5% - 95% @ 60°C (non-condensing)
Certifications
Safety: CB, UL/cUL, CSA, TUV, NOM, CCC, IRAM, PCT/GoST
Emissions: FCC, CE, VCCI, C-Tick, CCC, ANATEL, KCC
Environmental: RoHS



SOFTWARE PACKAGE SPECIFICATIONS

Base Packages ¹	SKU
4400 Appliance with Standard 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades); bundled with local management for up to 2 gateways	CPAP-SG4407
Secure Web Gateway with 7 blade suite (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Application Control, URL Filtering and Antivirus blades), bundled with SmartEvent and local management for up to 2 gateways	CPAP-SWG4400
4400 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades)	CPAP-SG4408
4400 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Antivirus, and Email Security blades); bundled with local management for up to 2 gateways	CPAP-SG4410
Software Blades Packages ¹	SKU
Check Point Extended Security Software Blades Package for 1 year for 4400 appliance (including IPS, URL Filtering, Application Control, Antivirus, Email Security, and DLP blades)	CPSB-ESEC-6B-4400-1Y
Check Point UTM+ Software Blades Package for 1 year for 4400 appliance (including IPS, URL Filtering, Application Control, Antivirus, and Email Security blades)	CPSB-UTMP-5B-4400-1Y
Check Point DLP+ Software Blades Package for 1 year for 4400 appliance (including IPS, Application Control, and DLP)	CPSB-DLPP-3B-4400-1Y
Check Point Threat Prevention Software Blades Package for 1 year for 4400 (including IPS, Anti-Bot, URL Filtering and Antivirus blades)	CPSB-TPRV-4B-4400-1Y
Secure Web Gateway Software Blades package for 1 year for SWG-4400	CPSB-SWG-3B-4400-1Y
Check Point Extended Threat Protection Software Blades Package for 1 year for 4400 (including Application Control and IPS blades)	CPSB-ETPR-2B-4400-1Y
Check Point Web Control Software Blades Package for 1 year for 4400 (including Application Control and URL Filtering blades)	CPSB-WBCL-2B-4400-1Y
Check Point Anti-Malware Package for 1 year for 4400 (including Anti-Bot and AV blades)	CPSB-ABAV-2B-4400-1Y
Additional Software Blades ¹	SKU
Check Point Mobile Access Blade for up to 50 concurrent connections	CPSB-MOB-50
Data Loss Prevention Blade for 1 year (for up to 500 users, up to 15,000 mails per hour and max throughput of 700 Mbps)	CPSB-DLP-500-1Y
Check Point IPS blade for 1 year	CPSB-IPS-S-1Y
Check Point Application Control blade for 1 year	CPSB-APCL-S-1Y
Check Point URL Filtering blade for 1 year	CPSB-URLF-S-1Y
Check Point Antivirus Blade for 1 year	CPSB-AV-S-1Y
Check Point Anti-Spam & Email Security Blade for 1 year	CPSB-ASPM-1Y
Check Point Anti-Bot Blade for 1 year - for low-end appliances and pre-defined system	CPSB-ABOT-S-1Y

¹ High Availability (HA) and SKUs for 2 and 3 years are available, see the online Product Catalog

VIRTUAL SYSTEMS PACKAGE

Description	SKU
10 Virtual Systems package	CPSB-VS-10
10 Virtual Systems package for HA/VSLs	CPSB-VS-10-VSLs
3 Virtual Systems package	CPSB-VS-3
3 Virtual Systems package for HA/VSLs	CPSB-VS-3-VSLs



ACCESSORIES

Description	SKU
4 Port 10/100/100Base-T RJ45 interface card	CPAC-4-1C
4 Port 1000Base-F SFP interface card; requires additional 1000Base SFP transceiver modules per interface port	CPAC-4-1F
SFP transceiver module for 1G fiber ports—long range (1000Base-LX) for CPAC-4-1F	CPAC-TR-1LX
SFP transceiver module for 1G fiber ports—short range (1000Base-SX) for CPAC-4-1F	CPAC-TR-1SX
Bypass Card	SKU
4 Port 1GE short-range Fiber Bypass (Fail-Open) Network interface card (1000Base-SX)	CPAC-4-1FSR-BP
4 Port 1GE long-range Fiber Bypass (Fail-Open) Network interface card (1000Base-LX)	CPAC-4-1FLR-BP
4 Port 1GE copper Bypass (Fail-Open) Network interface card (10/100/1000 Base-T)	CPAC-4-1C-BP
Spares and Miscellaneous	SKU
Slide RAILS for 4000 and 12000 Appliances (22"-32")	CPAC-RAILS
Extended Slide Rails for 4000 and 12000 Appliances (26"-36")	CPAC-RAILS-EXT

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

959 Skyway Road, Suite 300, San Carlos, CA 94070 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com